



GÜNTHER^{GmbH}

Temperaturmesstechnik



Messtechnik Schaffhausen GmbH
Mühlenstrasse 4, CH-8260 Stein am Rhein
Telefon +41 52-672 50 00
Telefax +41 52-672 50 01
www.mts.ch, e-mail: info@mts.ch

Messen Prüfen Automatisieren www.mts.ch

**Product category 52-WOS
Mineral Insulated Resistance
Thermometers without Protection Tube**



Application Examples for Mineral Insulated Resistance Thermometers without Protection Tube:



Plant and Machine Construction



Automobile Industry



Laboratories



Plastic Industry

Availability:

We offer every current version and diameter of mineral insulated resistance thermometer with mounted plug-and-socket connectors, connector heads, compensation lines with or without specialised contacts, as well as accessories and every type of mounting.

52-WOS

Mineral Insulated Resistance Thermometers without Protection Tube

Sensors of this type are used for general temperature measurement up to 600°C, on rare occasions up to 800°C. They are suited for surface temperature measurement as well as measurements of liquids and gases.

Depending on the connection type (2-wire, 3-wire or 4-wire – in turn depending on the required measurement precision and connector length), resistance thermometers consist of 2, 4 or 6 copper feed lines (inner conductors), surrounded by a thin metallic protective mantle, usually made of high-grade steel. The inner conductors are firmly press-fitted and insulated in ceramic powder. The precision resistor inside the sensor tip is connected through the inner conductors.

As a result of their structure, mineral insulated resistance thermometers have the following advantages:

- Small physical dimensions with maximum flexibility for temperature measurement at sites with difficult accessibility (diameter 1,5 – 6,0 mm).
- Short response time for exact measurements of temperature variations
- Optimal protection for the sensor system against corrosion, oxidation, physical damage and chemical contamination as a result of the enclosed structure
- The enclosed structure also facilitates application of these sensors without additional protective fitting

Our resistance thermometers are also available in explosion protected ATEX models.





① Connection Components (Plug/Socket)

LEMO Size 0 - 3
Standard
Miniature
High-Temp.-Standard
High-Temp.-Miniature
Ceramic-Standard
Ceramic-Miniature

② Connection Head

with connecting thread	
B	(M24 x 1,5)
BUS	(M24 x 1,5)
BUZ	(M24 x 1,5)
BUZH	(M24 x 1,5)
BBK	(M24 x 1,5)
DL (MA)	(M10 x 1)

or with thread diameter of 15,3 mm

③ Process Connector (Detachable)


Clamp Connectors	Steel/High-Grade Steel
Pressure Ring	Teflon
Cutting Ring	High-Grade Steel

M 8x1 for Mantle Diameter 1,0-3,0 mm
G 1/8 A for Mantle Diameter 1,0-3,0 mm
G 1/4 A for Mantle Diameter 4,5-8,0 mm
G 1/2 A for Mantle Diameter 4,5-8,0 mm

④ Mineral-Insulated Gauge Slide

Mantle Diameter:	2,0 - 8,0 mm
Tip Diameter:	2,0 - 10,0 mm
Connection:	
1 x Pt100 up to 3 x Pt100 Ohm	
2-Wire up to 4-Wire	

Example of a common implementation in this product line

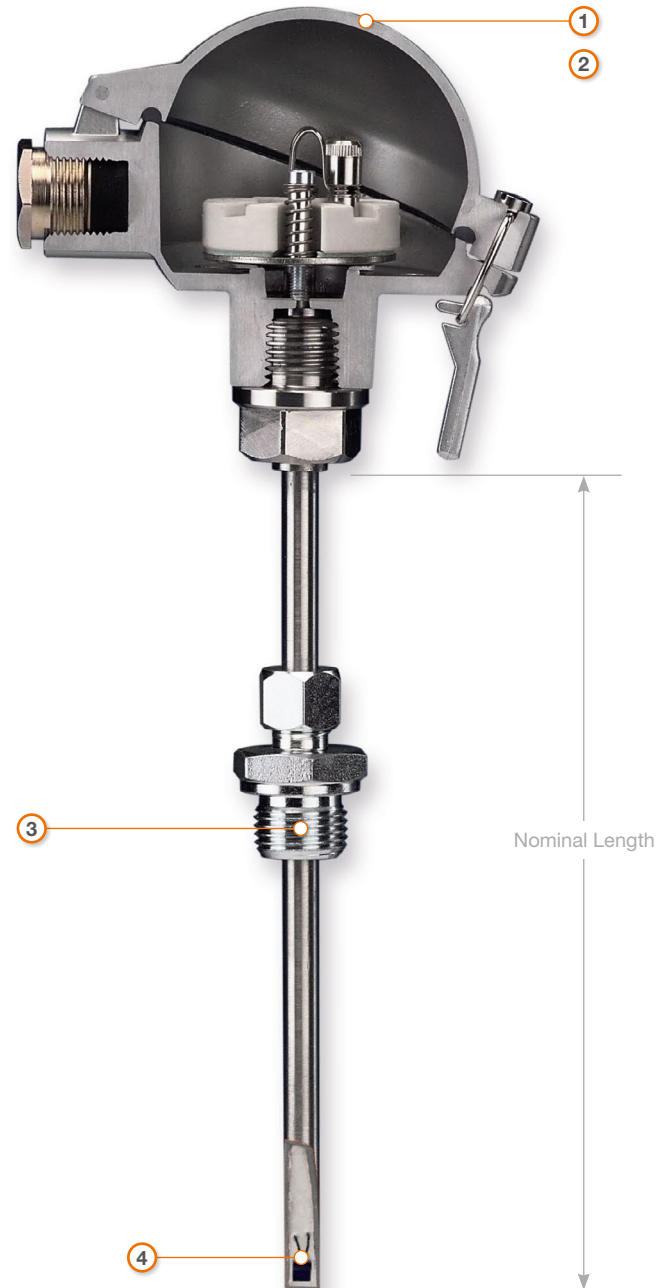

Individual Solutions such as, for example materials, process connectors, accessories, etc. not listed here, are often viable.

Please contact us for further information!

52 - WOS // Sheath resistance thermometers without protection tube/thermowell

Sheath resistance thermometer

5	2
---	---

 -

--	--	--	--	--	--	--	--

 -

--	--	--	--

Nominal length / mm

Contact terminations:

Connection head with a connection thread			Connection head with a connecting diameter of 15.3 mm		
B	(M24 x 1.5)	20 10	B		25 10
BUS	(M24 x 1.5)	20 15	BUS		25 15
BUSH	(M24 x 1.5)	20 20	BUSH		25 20
BUZ	(M24 x 1.5)	20 25	BUZ		25 25
BUZH	(M24 x 1.5)	20 30	BUZH		25 30
BBK	(M24 x 1.5)	20 35	BBK		25 35
DL (MA)	(M10 x1)	20 40			

Joining elements

Plug			Coupler		
Lemo	Size 0	30 10	Lemo	Size 0	35 10
Lemo	Size 1	30 15	Lemo	Size 1	35 15
Lemo	Size 2	30 20	Lemo	Size 2	35 20
Lemo	Size 3	30 25	Lemo	Size 3	35 25
Standard		30 30	Standard		35 30
Miniature		30 35	Miniature		35 35
High-temp standard		30 40	High-temp standard		30 40
High-temp miniature		30 45	High-temp miniature		30 45

Cable transition sleeve + compensation circuit 4X XX
(XXX = length of the compensation circuit in XX.X m)

Sheath measurement inserts

Sheath ø [mm]	2.0	3.0	4.5	6.0	6.0	6.0	8.0	8.0
Point ø [mm]	2.0	3.0	4.5	6.0	8.0	10.0	8.0	10.0

Circuit

1xPt100 ohm								
2-wire	00	10	20	30	40	50	60	70
1xPt100 ohm								
3-wire	01	11	21	31	41	51	61	71
1xPt100 ohm								
4-wire	02	12	22	32	42	52	62	72
2xPt100 ohm								
2-wire	03	13	23	33	43	53	63	73
2xPt100 ohm								
3-wire	04	14	24	34	44	54	64	74
3xPt100 ohm								
2-wire	05	15	25	35	45	55	65	75
2xPt100 ohm								
4-wire	06	16	26	36	46	56	66	76

Fastening

Attachment screw fastening: Made of Steel / Stainless steel

(Tapered ring, mat. no. 1.4541)

M 8 x 1 for sheath ø 1.0-3.0 mm	11	21
G 1/8 A for sheath ø 1.0-3.0 mm	12	22
G 1/4 A for sheath ø 4.5-8.0 mm	13	23
G 1/2 A for sheath ø 4.5-8.0 mm	14	24

(Tapered ring unit St. 35.8)

M 8 x 1 for sheath ø 1.0-3.0 mm	51	31
G 1/8 A for sheath ø 1.0-3.0 mm	52	32
G 1/4 A for sheath ø 4.5-8.0 mm	53	33
G 1/2 A for sheath ø 4.5-8.0 mm	54	34

Screwed socket combined

G 1/4 A	80
G 3/8 A	81
G 1/2 A	82
G 1 A	83
M 20 x 1.5	84
M 18 x 1.5	85
M 14 x 1.5	86

(Teflon thrust collar)

M 8 x 1 for sheath ø 1.0-3.0 mm	61	41	
G 1/8 A for sheath ø 1.0-3.0 mm	62	42	No fastening
G 1/4 A for sheath ø 4.5-8.0 mm	63	43	
G 1/2 A for sheath ø 4.5-8.0 mm	64	44	Other



MTS Messtechnik Schaffhausen GmbH
CH-8260 Stein am Rhein
Telefon +41 52-672 50 00
Messen Prüfen Automatisieren www.mts.ch

Custom designs:

5	2
---	---

 -

9	9	5	2	x	x	x	x
---	---	---	---	---	---	---	---

 -

--	--	--	--

Consecutive no. Nominal length / mm